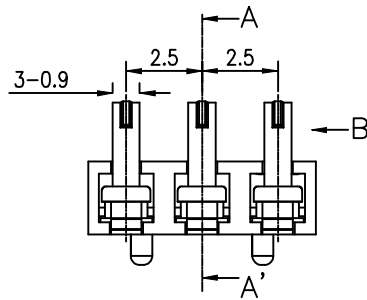





SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)



1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2. LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.

3. TEMPERATURE RISE : 30°C MAX

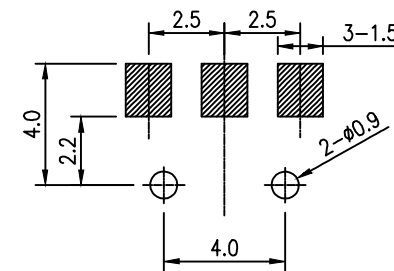

P.C.B LAYOUT

CIRCUIT

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	BeCu	3	Au PLATED
NO.	PARTS	MATFRIAL	QTY.	FINISHING

UNLESS TOLERANCES		DWN	LILY	DATE	2015.11.27	3RD ANGLE PROJECTION	NAME	
		CHKD	ANDY	DATE	2015.11.27		2.5PITCH BATTERY	
X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10	X.X" ± 3" X.XX" ± 1" X.XXX" ± 0.5"	APVD	JON	DATE	2015.11.27	UNIT: mm	CAT. NO.	JCBA-3P-2.5PH-4.3H-S-P7.5H
		JKCR Electronics Co., Ltd.					DWN.NO.	HF-BC-2.5PH-4.3H-S-P7.5H